


Installation space/Operational environment |

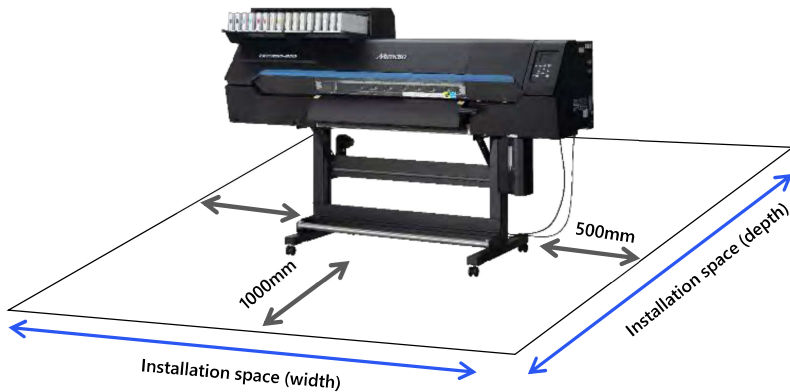

Item	Width	Depth	Height	Weight
Installation space	3,084 mm	2,700 mm	1,389 mm	161 kg
Outside dimension	2,084 mm	700 mm	1,389 mm	161 kg
Packing size	2,240mm	922mm	986mm	204kg

Operational environment	Temperature/Humidity
Usable environment	20~30 °C (68~86 °F) 35~65% Rh (No condensation)
Accuracy guaranteed	20~25 °C (68~77°F)

Precautions



- Do not install this machine in locations where dust or powder is present. Failure or printing defects may result (e.g., nozzle clogging, deflection) if dust gets inside the machine.
- Do not install this machine in locations exposed to drafts (e.g., from air conditioning) or dust or powder may get inside the machine.
- Do not install this machine in unstable locations or locations subject to vibration. This will increase the risk of failure or printing defects (e.g., nozzle clogging, deflection).
- Do not install this machine in locations exposed to direct sunlight.
- Do not install this machine in locations subject to sudden temperature changes. This will increase the risk of failure or printing defects (e.g., nozzle clogging, deflection).
- Do not install this machine in locations exposed to excessive noise from large machinery.